



## **TESTS REPORT**

### **NF EN 14243-2 (February 2019)**

**Materials obtained from end-of-life tyres – Part 2: Granules and powders – Methods for determining the particle size distribution and impurities including free steel and free textile content**

# **RUBBER GRANULE POWDER 0.0-0.6**

# **RENECAL**

**LABORATORY TEST REPORT N° R221610.01-A1**

**LE MANS, 09/01/2023**

This report is composed of 3 pages and 1 annex.

Except with prior authorization, it may not be used for commercial purposes unless it is reproduced in its entirety.

The results are valid only for the tested samples. Complete results available on request.

## 1 ■ CLIENT DETAILS

Company : **RENECAL**  
Av. Explosivos, 25  
34880 GUARDO (PALENCIA)  
**SPAIN**

Date of order: 25/10/2022

Reception date: 24/11/2022

Sample reference: **033576 – POWDER 0.0-0.6**

Results apply to samples as received.

## 2 ■ TESTS PROGRAM

**LABOSPORT France** has been commissioned by **RENECAL** to carry out the following laboratory tests on rubber granules **POWDER 0.0-0.6** primarily designed for synthetic turf infill:

- Identification with particle size, shape, and bulk density
- Measurement of textile fibre, metal, and other impurities according to:
  - o **NF EN 14243-2 (February 2019)**: Materials obtained from end-of-life tyres – Part 2: Granules and powders – Methods for determining the particle size distribution and impurities including free steel and free textile content

## 3 ■ RESULTS

### ❖ Identification of the rubber granule:

| Properties         | Method          | Unit   | Results      | NF P 90-112* requirements |
|--------------------|-----------------|--|--------------|---------------------------|
| Particle size      | EN 933-1        | mm   | 0.2 – 0.63   | d ≥ 0.5 mm<br>D ≤ 3.15 mm |
| Particle shape     | EN 14955        | -  | Angular – A2 | -                         |
| Bulk density       | EN 1097-3       | g/cm <sup>3</sup><br>ou<br>Mg/m <sup>3</sup> | 0.32         | -                         |
| Colour measurement | Internal method | RAL  | 9 005        | -                         |

\* The requirement of the NF P 90-112 (2016) standard are given only for information.

➔ Picture and particle size curve of the tested sample are in annex of this report.

❖ **Measurement of fibre rate, metal rate and other impurities in %:**

| Element   | Method                                  | Units | Results             |
|---|---|-------|---------------------|
| Fibre rate  | NF EN 14243-2<br>Annex B <sup>(1)</sup> | (%)   | 0.00 <sup>(1)</sup> |
|   |   | (g)   | 0.0                 |
| Metal rate  | NF EN 14243-2<br>Annex A <sup>(2)</sup> | (%)   | 0.00 <sup>(2)</sup> |
|   |   | (g)   | 0.0                 |
| Impurities rate<br>(glass, sand or non-magnetic metal etc.) | NF EN 14243-2<br>Annex C <sup>(3)</sup> | (%)   | 0.00 <sup>(3)</sup> |
|   |   | (g)   | 0.0                 |

- (1) The Annex B of the NF EN 14243-2 standard defines that textile fibre integrated inside rubber grains are not considered on the result. Between 150g and 350g of sample mass is necessary to conduct the test.
- (2) The Annex A of the NF EN 14243-2 standard defines the test has to be conducted with a sample mass between 150 and 350g.
- (3) According to Annex C of the NF EN 14243-2 standard, on the mass used for the determination of the metal and fibre rate (%), a mass as close to 150g is taken to determine the impurities rate.

#### 4 ■ CONCLUSION

The tested sample "**Rubber infill POWDER 0.0-0.6**" do not present fiber rate, impurities rate and metal rate according to the test method of **NF EN 14243-2** standard: Materials obtained from end-of-life tyres – Part 2: Granules and powders – Methods for determining the particle size distribution and impurities including free steel and free textile content.

Le Mans, 09/01/2023




**APPROVAL**  
**Steve BAZEILLE**  
Laboratory D<sup>Pt</sup> Manager




**WRITER**  
**Florian DEU**  
Laboratory Technician

**ANNEX 1: RUBBER GRANULE POWDER 0.0-0.6mm**

**Picture of rubber granule**

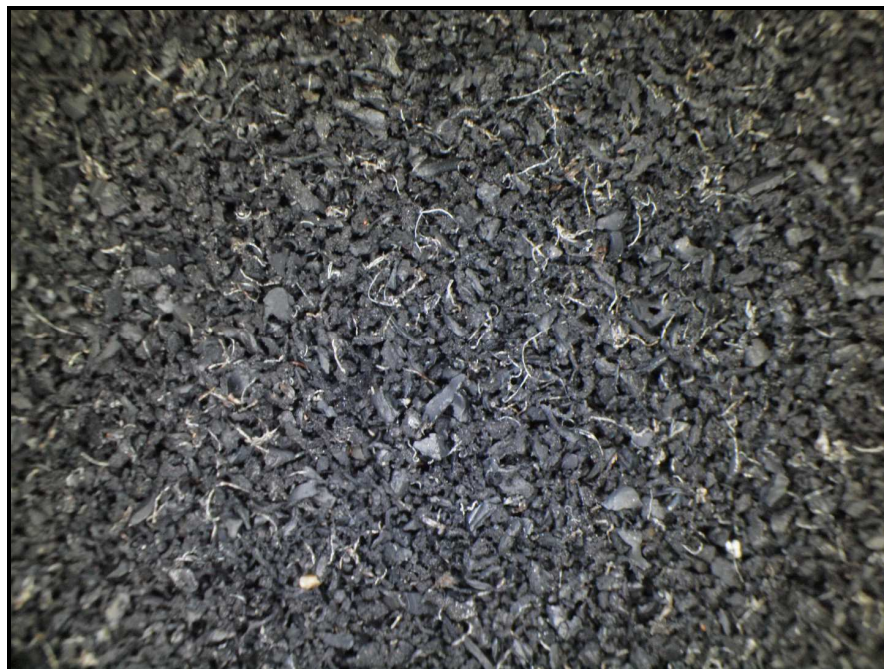

**Particle Size curve**

